

RR T2 RAPT OR
快速反应战术手电

使用说明书
感谢您购买我们的产品!
www.jetbeamlight.com

产品特性

- 磁环调光+尾部战术开关,可快速锁定想要档位,适用于军事、执法、探险及户外狩猎等
- 采用LUMINUS SST-70 LED,寿命长达50000小时,最高输出2080流明,最远射程322米
- 数字恒流驱动电路,续航最长可达60小时
- 隐藏爆闪+SOS+信标功能
- 电池电量检测功能
- 电池防反接保护
- 双面镀膜防刮光学镜片
- 航空级铝合金制造
- 不锈钢旋转控制环
- 三级硬质阳极氧化抗磨损表面处理
- 尾部倒立设计
- IPX-8级防水(水下2米)
- 1米抗摔

产品参数

- LED: LUMINUS SST-70 LED
- 最大输出: 2080流明
- 反光杯: 精密桔面反光杯
- 镜片: 钢化玻璃
- 筒身材质: 航空级铝合金
- 筒身处理: 军规三级硬质氧化铝军灰色表面耐磨处理
- 使用电池: 1*21700/1*20700/1*18650
- 开关: 磁环调光开关+尾部战术开关
- 长度: 150.5mm
- 头部直径: 38.5mm
- 尾部直径: 26.5mm
- 重量: 188克(不含电池)

选用电池

电池类型	尺寸规格	标称电压	是否可用
可充电锂离子电池	21700	3.7V	推荐
可充电锂离子电池	18650	3.7V	推荐
可充电锂离子电池	18350	3.7V	不可用
可充电锂离子电池	16340	3.7V	不可用
一次性锂电池	CR123A	3.0V	不可用

亮度和时间

FL1 EMISSIONS	极亮	高亮	中亮	低亮	爆闪	SOS
2080lm 3.5min	800lm 4.7h	200lm 10.6h	15lm 60h	750lm /	750lm /	322m
						26010坎德拉
						1米 (防跌落高度)
						IPX-8 (水下2米)


免费赠送: 手绳*1, O圈*2, 按钮胶帽*1, 手电套*1, 21700 5100mAh可充电锂电池*1

注:
以上数据是按照国际电筒测量标准ANSI/NEMA, FL1所述之测量方法,使用一节JETBeam 21700 5100mAh(3.7V)可充电锂电池在实验室内测量所得,不同电池或使用环境可能会对以上数据产生影响。

操作手电

装入电池

1. 打开尾盖,从包装取出手电以及电池
2. 电池正极朝向手电头部(LED所在的一端)装入手电
3. 旋紧尾盖

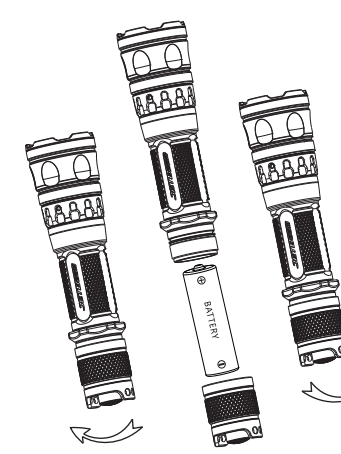

警告

1. 请将电池按照正负极朝灯头方向放入,反装电池电筒将不能工作。
2. 不能将光线直接照射眼睛,以免对眼睛造成伤害。

开启&关闭
尾部战术开关ON/OFF手电

亮度及模式调节
开机状态
旋转尾部环圈调节档位: 低-中-高-超高-闪烁
在闪烁模式下
按尾部开关切换闪烁档位: 爆闪-SOS-信标-电池电量
所有档位带记忆



保养电筒

1. 长时间不用手电时请取出电池
2. 保存手电时请远离火和潮湿环境
3. 请每半年使用软布清洁电筒的螺牙,并使用硅润滑油润滑螺牙,另请经常清洁手电的导电接触面/接触点。

保固

JETBEAM* 产品拥有售后保固服务,在购买本产品的15天内,如果有任何质量问题均可向经销商要求免费更换,在购买本产品的60个月内享受免费保固服务,在超过60个月免费保固期后,本产品享有终身有限度保固服务,如需要更换重要部件则需要收取成本费用。

本保固规则不适用于以下情况:
1. 人为破坏,拆解,改装本产品
2. 错误操作导致产品损坏(如装反电池等)
3. 电池漏液导致产品损坏
4. 盐水或海水腐蚀导致产品损坏


如需协助,JETBEAM* 敬 请消费者首先联系购买产品的经销商或零售商,以获得最迅速的售后服务或发邮件到 info@jetbeamlight.com。

备注: 产品数据如有更新,敬请以JETBEAM官方网站为准。

★ 仅限国内区域,跨区域销售将不予保修。

深圳市杰特明电子科技有限公司
咨询热线: +86-0755-28077748
销售邮箱: info@jetbeamlight.com
网 址: www.jetbeamlight.com
公司地址: 广东省深圳市龙华新区大浪南路楷育工业区 一栋三楼
邮 编: 518109

RöHS
FC CE

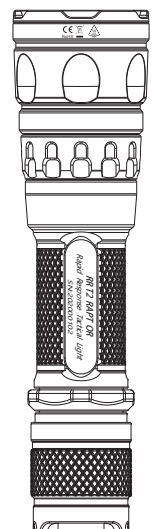

RR T2 RAPT OR
Rapid Response Tactical Light

Manual
Thank you for choosing our products!
www.jetbeamlight.com

Features

- Built for the application of law enforcement, defense, military and hunting.
- Convenient four mode selection, strobe and SOS by rotating ring.
- Reliable tactical tail switch
- Uses one LUMINUS SST-70 LED with a lifespan of up to 50,000 hours.
- Max output up to 2080 lumens and max beam distance up to 322 meters.
- Intelligent drive circuit prevents over-discharging Li-ion cells
- Adopt efficient digital constant current circuit, run time of max output up to 60 hours.
- Battery level detection function.
- Battery reverse protection function.
- Toughened ultra-clear mineral glass with anti-reflective coating.
- Constructed from aero grade aluminum alloy.
- Stainless steel revolve control ring.
- Military grade HAIII hard-anodized finish.
- Tail Inverted Design.
- IPX-8 waterproof (submersible up to 2 meters).
- 1 meter impact resistant.

Specifications

- LED: LUMINUS SST-70 LED
- Maximum output: 2080 lumens
- Reflector cup: orange peel
- Lens: tempered glass
- Material: aero-grade aluminum alloy
- Barrel treatment: Military grade three-level hard oxidized army gray surface wear-resistant treatment
- Battery: 1* 21700 / 1* 20700 / 1* 18650
- Switch: Stepless magnetic ring dimming switch + Tail tactical switch
- Length: 150.5mm
- Head diameter: 38.5mm
- Tail diameter: 26.5mm
- Weight: 188g (without batteries)

Battery for Use

Type	Nominal Voltage	Compatibility
Rechargeable Lithium battery	21700 3.7V	Yes(recommended)
Rechargeable Lithium battery	18650 3.7V	Yes(recommended)
Rechargeable Lithium battery	18350 3.7V	NO
Rechargeable Lithium battery	16340 3.7V	NO
Disposable Lithium battery	CR123A 3.0V	NO

Output & Runtime

FL1 EMISSIONS	Turbo	High	Medium	Low	Strobe	SOS
2080LM 3.5min	800LM 4.7h	200LM 10.6h	15LM 60h	750LM /	750LM /	322m
						26010cd
						1m (Impact Resistance)
						IPX8 (Underwater 2 meter)


Included for free: O ring*2, lanyard*1, Holster*1, Rubber cap*1, 21700 5100mAh USB Rechargeable battery*1

Note
The above data is based on the international flashlight measurement standard ANSI / NEMA, The measurement method described in FL1 is measured in a laboratory using a JETBeam 21700 5100mAh (3.7V) rechargeable lithium battery. Different batteries or use environments may affect the above data.

Operation of flashlight

Insert the battery

1. Open the tail cover and remove the flashlight and battery from the package
2. Insert the battery's positive pole towards the head of the flashlight (the end where the LED is located)
3. Tighten the end cap and insert the battery

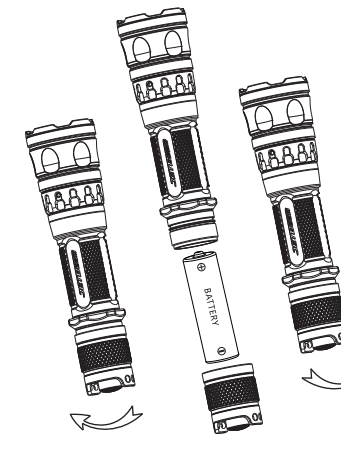


Warning

1. Please put the battery in the direction of the positive pole toward the lamp head, and the battery flashlight will not work if it is reversed
2. Do not shine light directly on the eyes to avoid damage to the eyes.

ON/OFF
Take the battery out for storage if light will not be used for a long time.

Brightness and mode adjustment

- When the light is turned on, rotate the magnetic ring to changes the various brightness modes from Low-Middle-High-Turbo-Strobe.
- In flashing mode, press the tail switch to changes the flashing mode from Strobe-SOS-Beacon-Power Indicator.
- This light has a memory function.

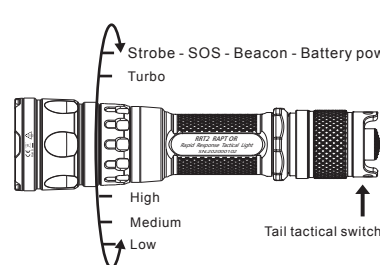

Light Maintenance

1. This product is disassembled or modified by anyone other than an authorized JETBeam warranty technician.
2. This product is damaged by using the wrong battery or incorrect usage.
3. This product is damaged by defective batteries (such as battery leak).
4. Salt water and corrosive damage to the unit.

Service

1. In need of warranty service, please contact your local official JETBeam dealer
2. To contact JETBeam, please refer to below information:
Email: info@jetbeamlight.com
Phone: +86-0755-28077748
For the latest update, please visit www.jetbeamlight.com

330X120mm 128g双铜, 单黑双面印刷, 风琴折