

# **Specification Approval Sheet**

**Name: Li-ion Battery** 

**Model: 31001** 

SPEC: Li-18650 1S2P 3.7V 5200mAh-PCM- (3)

File Number:

Approved By	Checkup	Make
Shaopeng Yi		Yingchen
2013-10-26		2013-10-26

	Signature	Date
Customer	Company Name:	
Confirmation	Stamp:	

436 Kato Terrace, Fremont, CA 94539 U.S.A. Tel: 510.687.0388 Fax: 510.687.0328

www.Tenergy.com





Fremont, CA 94539

Tel: 510.687.0388 Fax: 510.687.0328 www.Tenergy.com email: sales@tenergybattery.com

## **Amendment Records**

Revision	Description	Issued Date	Approved By		
A0	New release	2012-4-30			
A1	Change the wire	2013-10-12			
A2	Change the Wire	2013-10-26			
	<u> </u>				

## **Tenergy Corporation**



436 Kato Terrace Fremont, CA 94539 Tel: 510.687.0388 Fax: 510.687.0328

www.Tenergy.com email: sales@tenergybattery.com

## 1 Scope

This document describes the performance characteristics and testing methods for Li-ion battery produced by Tenergy Corporation.

## 2 Product type and model number

## 2.1 Product type

Li-ion Battery

2.2 Model number: 31001

#### 3 Rated performance

Form 1: Battery rated performance

	Form 1: Battery rated performance				
No	Item	Rated performance	Remark		
1	Rated capacity	Nominal 5200mAh Min 5200mAh-5%	Standard discharge after standard charge		
2	Nominal voltage	3.7V	Mean operation voltage during standard discharge after standard charge		
3	Voltage at end of discharge	2.75V	Discharge cut-off voltage		
4	Charging voltage	4.2V			
5	Impedance	<100mΩ			
6	Standard charge				
7	Standard discharge	Constant current 0.2C <sub>5</sub> A End voltage2.75V			
8	Fast charge	$\label{eq:constant} \begin{split} & Constant \ current 0.5 C_5 A \\ & Constant \ voltage 4.2 V \\ & Cut-off \ current \le 0.02 C_5 A \end{split}$			
9	Fast discharge	Constant current 0.5C <sub>5</sub> A End voltage2.75V			
10	Maximum continuous discharge current	6.0A			
11	Operation	Charge: 0~45°C	60.25% P. H.		
11	temperature range	Discharge: -20~60°C	00±25% R.H		
12	Cycle life	>300cycles	Charging/discharging in the below condition: Charge: standard charge Discharge:0.2C <sub>5</sub> A to 2.75V Rest time between charge/discharge:30min Until the discharge capacity <80% of NC		
	Storage	≤1 month: -20 ~ 45°C	60.25% D.H		
13		≤3 months: -20 ~ 35 °C			
	temperature	≤1 year: 0 ~ 25 °C	Dest 10-23 Giol long-time storage		
14	Weight	Approx: 96g			
15	Dimension(mm)	Thickness*Width*Length(Max)	19.3*37.3*66.8		
11 12 13	discharge current Operation temperature range  Cycle life  Storage temperature Weight	Charge: 0~45°C  Discharge: -20~60°C  >300cycles  ≤1 month: -20 ~ 45°C  ≤3 months: -20 ~ 35°C  ≤1 year: 0 ~ 25°C  Approx: 96g	Charge: standard charge Discharge: 0.2C <sub>5</sub> A to 2.75V Rest time between charge/discharge: 30min Until the discharge capacity <80% of NC  60±25%R.H, Best 10~25°C for long-time storage		





436 Kato Terrace Fremont, CA 94539 Tel: 510.687.0388 Fax: 510.687.0328

www.Tenergy.com email: sales@tenergybattery.com

#### 4 Electrical performances

## Form 2: Battery electrical performances

No	Items	Test procedure	Requirements	
1	Nominal voltage	The average value of the working voltage during the whole discharge process.	3.7V	
2	Discharge performance	The discharge capacity of the battery, measured with $0.2C_5A$ down to $2.75V$ within 1 hour after a standard charge at $25\pm5$ °C	Discharge ≥Minimum capacity	
3	Capacity retention	After 28 days storage at 25±5°C, after having been standard charged and discharged at 0.2C <sub>5</sub> A to 2.75V (the residual capacity is above 85% of nominal capacity)	Discharge time≥4.25h	
4	Cycle life	Charging/discharging in the below condition: Charge: standard charge at 25±5°C  Discharge:0.2C <sub>5</sub> A to 2.75V  Rest time between charge/discharge:30min  Until the discharge capacity <80% of NC	>300cycles	
5	Storage	(Within 3 months after manufactured) The battery is charged with $0.2C_5A$ to $40\text{-}50\%$ capacity and stored at ambient temperature $25\pm5$ °C , $65\pm20\%$ RH for 12 months. After the 12 months storage period the cell is fully charged and discharged to 2.75V with $0.2C_5A$	Discharge time≥4h	

#### 5 Standard test conditions

Test should be conducted with new batteries within one week after shipment from our factory and the batteries shall not be cycled more than five times before the test. Unless otherwise defined, test and measurement shall be done under temperature of  $20\pm5^{\circ}$ C and relative humidity of  $45\sim85\%$ . If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature  $15\sim30^{\circ}$ C and humidity  $25\sim85\%$ RH.

#### 6 Cautions in use

To ensure proper use of the battery please read the manual carefully before using it.

## 6.1 Handling

Do not expose to, dispose of the battery in fire.

Do not put the battery in a charger or equipment with wrong terminals connected.

Avoid shorting the battery.

Avoid excessive physical shock or vibration.

Do not disassemble or deform the battery.

Do not immerse in water.

Do not use the battery mixed with other different make, type, or model batteries.

Keep out of the reach of children.

## Tenergy Corporation



436 Kato Terrace Fremont, CA 94539

Tel: 510.687.0388 Fax: 510.687.0328 www.Tenergy.com email: sales@tenergybattery.com

#### 6.2 Charge and discharge

Battery must be charged in appropriate charger only.

Never use a modified or damaged charger.

Do not leave battery in charge over 24 hours.

#### 6.3 Storage

Store the battery in a cool, dry and well-ventilated area.

#### 6.4 Disposal

Regulations vary for different countries, Dispose of in accordance with local regulations.

#### 7 Battery operation instruction

## 7.1 Charging

Charging current: Cannot surpass the biggest charging current which in this specification book stipulated.

Charging voltage: Does not have to surpass the highest amount which in this specification book stipulated to decide the voltage.

Charging temperature: The battery must charge in the ambient temperature scope which this specification book stipulated. Use the constant electric current and constant voltage to charge. Do not reverse charge. When the positive electrode and the cathode meet together, damage can be made for the battery.

## 7.2 Discharging current

The discharging current shall not surpass the biggest discharging current stipulated in this specification book. The oversized electric current discharge can lower the battery storage capacity and cause battery to generate heat.

#### 7.3 Electric discharge temperature

The battery discharge must carry on in the ambient temperature scope which this specification book stipulated.

#### 7.4 Over-discharge

Short time of excessively discharge will not affect the usage. But the long time excess discharge can damage the battery performance and cause the function losing. When the battery is not used for a long time, because of its automatic flashover characteristic, it may excessively discharges. To prevent excessively discharge occur, the battery should maintain certain electric quantity.

#### 7.5 Storage of battery

The battery should be stored within the temperature range which stipulated in the specification book. If the storage time surpasses six months, you should carry on additional charge to the battery.

#### 8 Other chemical reaction

Because batteries utilize chemical reactions, battery performance will deteriorate over time even only store there for a long period of time but without being used. In addition, if the using conditions, such as charge, discharge, ambient temperature etc. are not maintained within the specified ranges, the battery life expectancy may be shortened or the device which the battery is applied for could be damaged because of electrolyte leakage. If the battery can not sustain for a relatively long period of time at one charge, even if it is charged correctly, this may indicate it is time to change the battery.

#### 9 Note

Any other items which are not covered in this specification shall be agreed by both parties.





436 Kato Terrace Fremont, CA 94539

Tel: 510.687.0388 Fax: 510.687.0328 <a href="https://www.Tenergy.com">www.Tenergy.com</a> email: sales@tenergybattery.com


## 10 PCM performance

## 10.1 Electrical characteristics

Form 3: PCB electrical characteristics

Item	Symbol	Content	Criterion
	$V_{\mathrm{DET1}}$	Over charge detection voltage	4.25±0.05V
Over charge Protection	$V_{ m REL1}$	Over charge release voltage	4.05±0.05V
	$V_{ m DET2}$	Over discharge detection voltage	2.5±0.1
Over discharge protection	$V_{ m REL2}$	Over discharge release voltage	3.0±0.075V
		Rated operational current	6A
	${ m I_{DP}}$	Over current detection current	11±2A
Over current protection		Release condition	Cut load
	$tV_{ m DET3}$	Detection delay time	8.0~16.0ms
Ch		Detection condition	Exterior short circuit
Short protection		Release condition	Cut short circuit
Interior resistance	$R_{SS}$	Main loop electrify resistance	$R_{SS} \leq 30 m\Omega$
Current consumption	${ m I}_{ m DD}$	Current consume in normal operation	8μA Max
РСВ	FR4 RYD-01S-002 V1.0		
PCM	PCM-F3.7V 6.0/9.46A		

## 10.2 PCB Layout

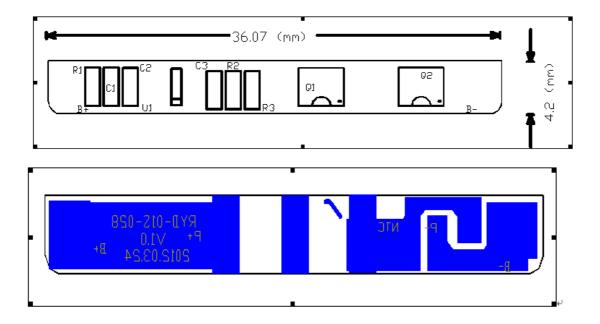

## **Tenergy Corporation**



436 Kato Terrace Fremont, CA 94539 Tel: 510.687.0388 Fax: 510.687.0328

www.Tenergy.com email: sales@tenergybattery.com

10.3 Terminal explanations

11.5.1 B+: Connected to the battery's positive terminal

11.5.2 B-: Connected to the battery's negative terminal

11.5.3 P+: Connected to the battery's output or the charger's positive terminal

11.5.4 P-: Connected to the battery's output or the charger's negative terminal

## 11 Battery pack drawing

**Drawing 1: Battery pack drawings** 

