

DURACELL[®] WITH

Size: 675

DURALOCK[™] POWER PRESERVE[™]




Zinc Air Battery – 0% Mercury



Zn/O₂



| | |
|------------------------------------|---|
| Nominal Voltage | 1.45 V |
| Rated Capacity | 600 mAh at 620 ohm to 1.1 V @ 21°C and 50% RH |
| Typical Impedance (Fresh) | 2.0 ohm @ 1kHz |
| Typical Weight | 1.85 g |
| Volume | 0.57 cm ³ |
| Terminals | Flat |
| Operating Temperature Range | 0°C to 50°C (32°F to 122°F) |
| Recommended Storage Temperature | 5°C to 30°C with 40-80% RH |
| Shelf Life | 4 years unactivated @ 21°C |
| Designation | ANSI: 7003 ZD IEC: PR44 |

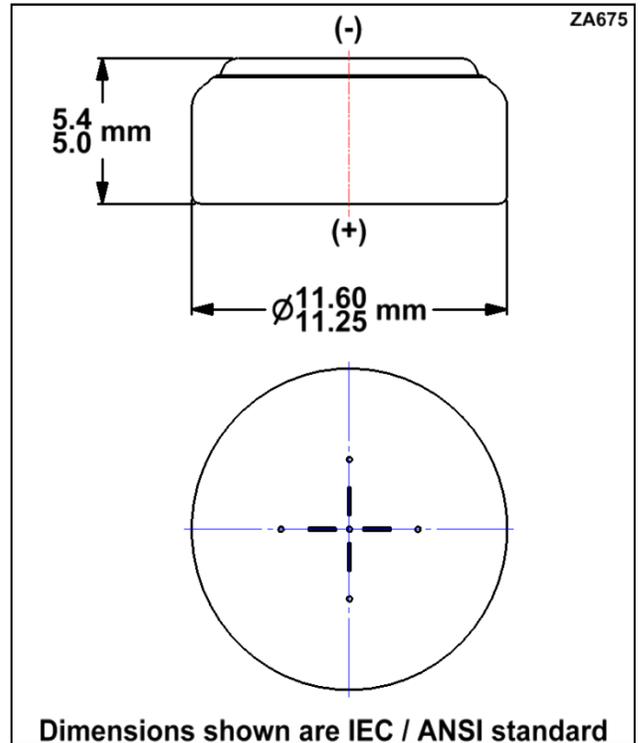

Typical Discharge Characteristics at 21°C (70°F) and 50% RH

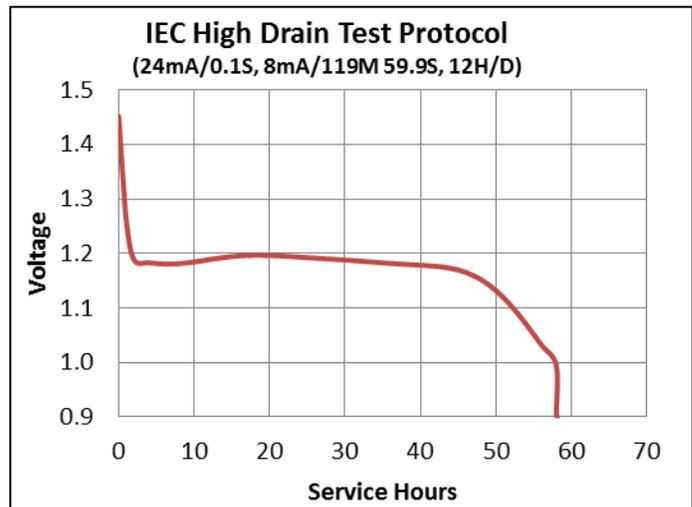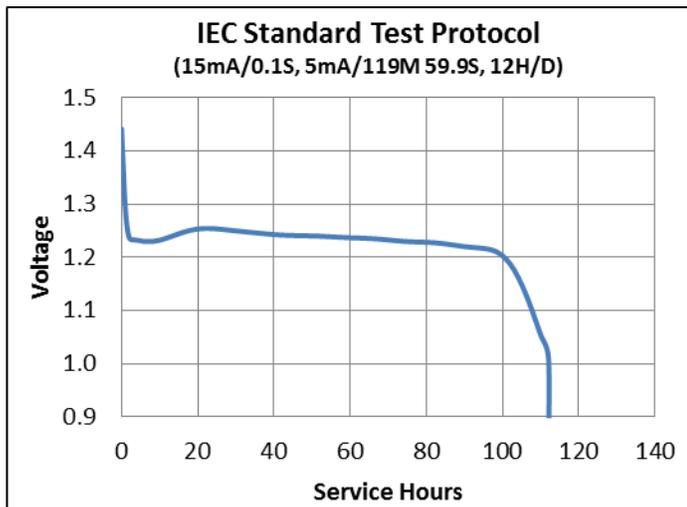

DURACELL[®]

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult Duracell.

ZA675US3E