


1-800-383-7323 USA/CAN www.energizer.com

# **ENERGIZER A93**





## **Industry Standard Dimensions**



### **Specifications**

Classification: Alkaline

Chemical System: Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

No added mercury or cadmium

Designation: ANSI-14A, IEC-LR14

Nominal Voltage: 1.5 volts

Jacket:

Operating Temp: -18°C to 55°C (0°F to 130°F)

Typical Weight: 66.2 grams (2.3 oz.)

**Typical Volume:** 26.9 cubic centimeters (1.6 cubic inch)


Plastic Label

**Shelf Life:** 7 years at 21°C (80% of initial capacity)

Terminal: Flat Contact

### **Performance Comparison**


A93 vs. Typical Carbon Zinc (C) at 21°C



**Industry Standard Testing Protocol** 

#### **Device Selection Guide:**

#### **Battery Selection Indicator**

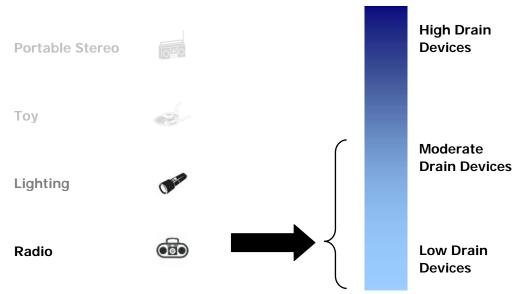

#### **Important Notice**

This data sheet contains typical information specific to products manufactured at the time of its publication.

© Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Form No. EBC - 1188G Page 1 of 1