


Rayovac Stock Number: **CR2**

Document Number: **S6600159** Rev.: **G**

**Dimensions:**  
(ANSI / IEC Standards)

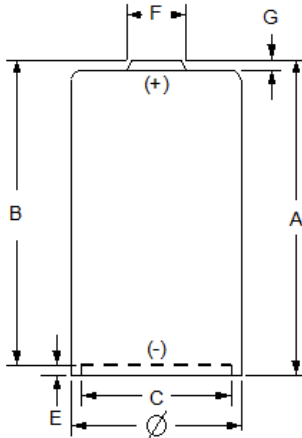

Dimension	Millimeters	Inches
A (Max)	27	1.063
B (Min)	25.8	1.015
C (Min)	8.5	0.335
E (Max)	0.5	0.02
E (Min)	0.05	0.002
F (Max)	6.5	0.256
G (Min)	0.7	0.027
∅ (Max)	15.6	0.614
∅ (Min)	15.1	0.594

**Engineering Data:**

<b>Cell Chemistry:</b>	Lithium/Manganese Dioxide (CR)	<b>Approximate Volume:</b>	5.16 CU CM
<b>Designation:</b>	ANSI/NEDA-5046LC, IEC-CR2	<b>Nominal Capacity:</b>	850mAh (100 Ohm Cont. to 2.0V @ 20°C)
<b>Nominal Voltage:</b>	3.0 V	<b>Operating Temp. Range:</b>	-20°C to 60°C
<b>Maximum Off-Load Voltage:</b>	3.7 V	<b>Storage Temp. Range</b>	-20°C to 45°C
<b>Approximate Weight:</b>	11 g	<b>Terminals:</b>	Cap and Recessed Base
<b>Environmental:</b>	No mercury added formulation meets Environmental Protection (EPA) requirements for landfill disposal.		

**Typical Service @ 20°C:**

Application:	Load	Load Unit	Duty Cycle	Daily Cycle	EPV	ANSI Min. Ave. Duration	Typical
<b>Rating:</b>	100	Ohms		24 h	2.0	25 Hours	32 Hours

